

Technical Datasheet

Mercury

Exterior



LUXULTRA LIGHTING
TECHNOLOGY DRIVEN





DESCRIPTION

A high efficiency, performance floodlight in an anthracite finish.

KEY FEATURES

Asymmetric optical distribution.
Tempered glass lens with an extruded aluminium body and zinc coated stirrup mounting bracket.

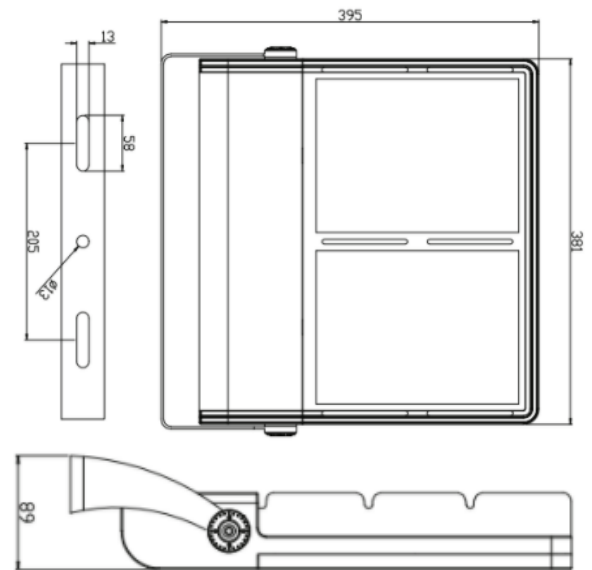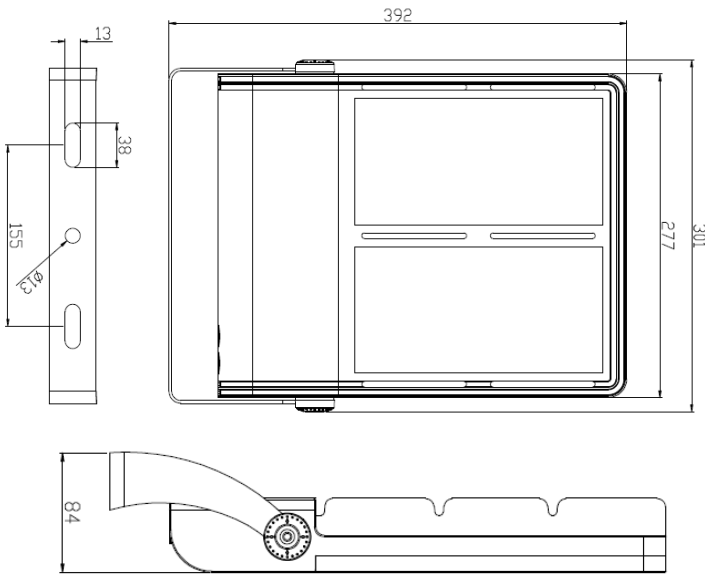

Code	Type	Watts	Lumens (LM)	IP Rating	Size (L)	Size (W)	Size (H)
LXFLD50	ASYMMETRIC LED FLOOD	50W	6,500	IP65	392mm	301mm	84mm
LXFLD100	ASYMMETRIC LED FLOOD	100W	13,000	IP65	392mm	301mm	84mm
LXFLD150	ASYMMETRIC LED FLOOD	150W	18,000	IP65	395mm	381mm	89mm
LXFLD200	ASYMMETRIC LED FLOOD	200W	26,000	IP65	395mm	381mm	89mm

CONTACT US

Luxultra Lighting Limited
Unit 3,
Alfred Court, Saxon Business Park
Bromsgrove, B60 4AD

Phone: 01527 880161
Web: www.luxultra.co.uk

Mail: info@luxultra.co.uk

