


Technical Datasheet

Brompton

Commercial



LUXULTRA LIGHTING
TECHNOLOGY DRIVEN

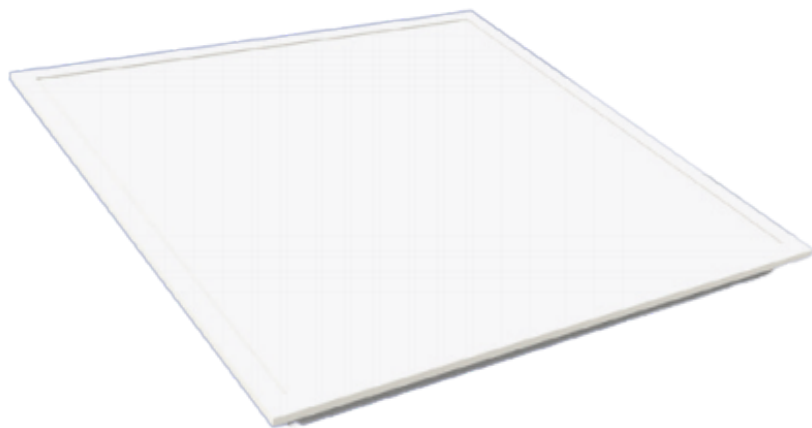


KEY FEATURES

- Backlit c/w Opal Diffuser.
- Suits both 15-24mm exposed T-Bar ceiling grids and has a flat extruded aluminium frame
- Supplied with Loop-In, Loop-Out connector as standard.

DESCRIPTION

A back-lit recessed panel with opal diffuser.

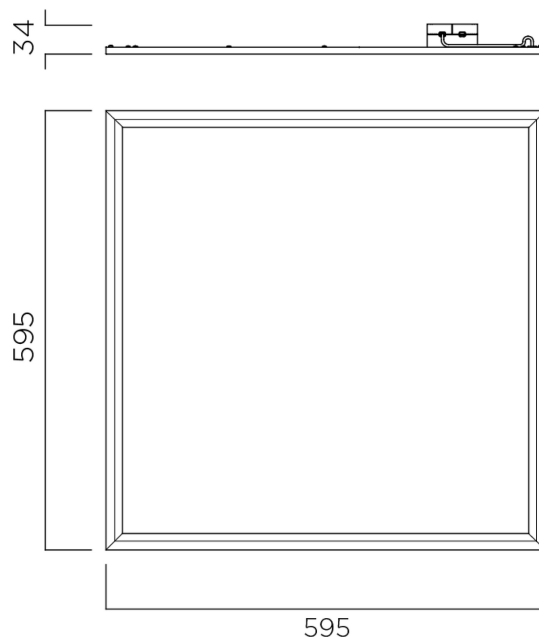

IP20

LED

5YR

Code	Length (mm)	Width (mm)	Height (mm)	Circuit Watts (W)	IP Rating	Luminaire Lumens (lm)	Colour Temperature
LXBRO/30/840	595	595	34	30W	IP20	3,000	4000K

Options /DALI Dali Dimming /RM3 Remote Emergency

CONTACT US

Luxultra Lighting Limited
Unit 3,
Alfred Court, Saxon Business Park
Bromsgrove, B60 4AD

Phone: 01527 880161
Web: www.luxultra.co.uk

Mail: info@luxultra.co.uk

